


WELDBABY 180i



Honda GX200 Engine



Control Panel

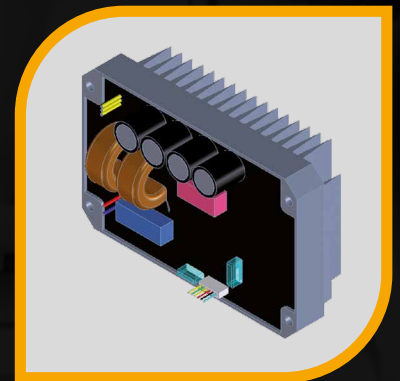

Inverter



Stage V

We offer now what others will do tomorrow.



GenSet s.p.a.

Via Stazione 5 - 27030
Villanova d'Ardenghi (PV) - Italy
Phone: +39-0382-5091

commerciale@genset.it
www.genset.it

GenSet
Next Gen technology
for top business.

PORTABLE ENGINE DRIVEN WELDER WITH INVERTER
WELDING OUTPUT POWER 165 A DC
AC SINGLE-PHASE AUXILIARY POWER AVAILABLE
PETROL ENGINE 3600 RPM STAGE V

Standard Features	<p>Welding processes: SMAW (stick)</p> <ul style="list-style-type: none"> • Low oil level shutdown device • 1 x 16 A, 110V AC- single-phase EEC socket • 1 x 16 A, 230V AC- single-phase EEC socket • Switch breaker • Automatic idle device when no load is connected
Noise level	<ul style="list-style-type: none"> • Lwa 98 (73 dB a 7 mt)
DC welding	<ul style="list-style-type: none"> • Duty Cycle @ 60%: 165 A - 24 V • Output range: 40 A - 165 A • Open Circuit Voltage: 70 V • Max welding rod: 4 mm
AC generator - 50Hz	<ul style="list-style-type: none"> • Type: synchronous, permanent magnets (PMG) • Single-phase power: 1 kVA - 230 V AC • Single-phase power: 0,5 kVA - 110 V AC • Power factor: $\cos \phi$ 1
Petrol Engine 3600 rpm	<ul style="list-style-type: none"> • Type: Honda GX 200 - STAGEV - 1 cyl. - 5,8 HP (4,3 kWm) - 196 cm³ • Cooling system: air • Starting system: recoil • Fuel tank capacity: 3,1 lt • Fuel consumption @ 75%: 1,8 lt/h
Other features	<ul style="list-style-type: none"> • Insulation Class: H • Ambient temperature: 40 °C (*) • Altitude: 1000 mt (*) • Mechanical Protection: IP 23 • Dimensions (L x W x H): 510 x 440 x 460 mm • Dry weight: 35 kg

(*) - For altitude and temperature values higher than those listed above, please consult the manufacturer to verify the available power.
 In line with our continued development, innovation and voice of customer program, we reserve the right to change data without notice.